Schlumberger

Maverick GT1000

Fast-moving rig

Drawworks rating 2,200 hp

(two 1,150-hp rating)

Load rating

1,000,00 lbf [4,448,222 N]

Skidding capable

Yes

Load count

Not determined yet

Crane required to move


Yes



Mast	14 11 071000
Make and model	Maverick GT1000
Height	157 ft [48 m]
Static hook load	1,000,000 lbf [4,448,222 N]
Substructure	
Make and model	Maverick GT1000
Floor height	35 ft [10.7 m]
Clear height	30 ft [9.1 m]
Rotary load capacity	1,000,000 lbf [4,448,222 N]
Setback load capacity	800,000 lbf [3,558,577 N]
Traveling assembly	
Traveling block	Cameron
Load rating	1,000,000 lbf [4,448,222 N]
Topdrive	
Make and model	Cameron TD-500-AC-2M-ROF
Load rating	1,000,000 lbf [4,448,222 N]
Max. drilling torque	51,000 ft.lbf [69,147 N.m]
Breakout torque	75,000 ft.lbf [101,686 N.m]
Rotary table or slip table	
Make and model	Cameron LST-37.5
Table opening size	37½ in [953 mm]
Mud pumps	
Make and model	CMP-2200
Max. input horsepower	2,200 hp
Mud system	·
Active (usable) volume	2,600 bbls [413 m ³]
Number of tanks	6
Power generation	
Make and model	CAT 3512C
Horsepower rating	1,476 hp
Kilowatt rating	1,101 kW
Well control	
Annular preventer	Cameron
Pressure rating	10,000 psi [68.9 MPa]
Opening size	13% in [346 mm]
Ram preventer	Cameron; one single, and one double
Pressure rating	5,000 psi [34.5 MPa]
Opening size	13% in [346 mm]
Choke manifold	Cameron
Pressure rating	5,000 psi [34.5 MPa]
Size	4 in [102 mm]
Accumulator	Cameron
Number of stations	7
Total volume	500 galUS
Pressure rating	3,000 psi [20.7 MPa]
- 1 1000 and rading	υ,ουο μοι (20.7 Ιντι α)

Maverick GT1000

Mud-gas separator	M-I SWACO (35-bbl)
Vessel diameter	36 in [914 mm]
Fuel tank	
Capacity	500 bbl [79,500 L]
Water tank	
Capacity	1,000 bbl [159,000 L]
Additional equipment	
Skidding system	T&T Engineering Services Lift & Slide
Catwalk	Cameron
Pipe spinner	Blohm & Voss GraySpin Mark 20
Power slips	None

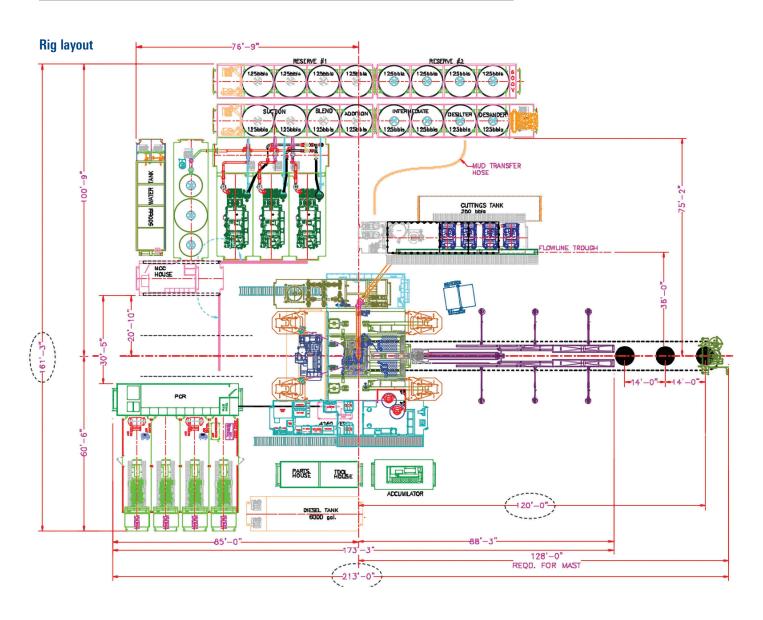

equip.slb.com/maverick

