## Schlumberger

## Maverick T1000

## Fast-moving rig

**Drawworks rating** 2,200 hp

(one 2,200-hp rating)

Load rating

1,000,00 lbf [4,448,222 N]

**Skidding capable** 

Yes

Load count

Not determined yet

Crane required to move


Yes



Mast           Make and model         Maverick T1000           Height         142 ft [43 m]           Static hook load         1,000,000 lbf [4,448,222 N]           Substructure         Maverick T1000           Floor height         28 ft [8.5 m]           Clear height         24 ft [7.3 m]           Rotary load capacity         1,000,000 lbf [4,448,222 N]           Setback load capacity         700,000 lbf [3,113,755 N]           Traveling assembly         Traveling assembly           Traveling block         Cameron           Load rating         1,000,000 lbf [4,448,222 N]           Make and model         Cameron TD-500-AC-2M-R0F           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [63,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp           Mud system
Make and model         Maverick T1000           Height         142 ft [43 m]           Static hook load         1,000,000 lbf [4,448,222 N]           Substructure         Make and model           Make and model         Maverick T1000           Floor height         28 ft [8.5 m]           Clear height         24 ft [7.3 m]           Rotary load capacity         1,000,000 lbf [4,448,222 N]           Setback load capacity         700,000 lbf [3,113,755 N]           Traveling assembly         Traveling assembly           Traveling block         Cameron           Load rating         1,000,000 lbf [4,448,222 N]           Make and model         Cameron TD-500-AC-2M-R0F           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [69,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Height 142 ft [43 m]  Static hook load 1,000,000 lbf [4,448,222 N]  Substructure  Make and model Maverick T1000  Floor height 28 ft [8.5 m]  Clear height 24 ft [7.3 m]  Rotary load capacity 1,000,000 lbf [4,448,222 N]  Setback load capacity 700,000 lbf [4,448,222 N]  Setback load capacity 700,000 lbf [3,113,755 N]  Traveling assembly  Traveling assembly  Traveling block Cameron  Load rating 1,000,000 lbf [4,448,222 N]  Topdrive  Make and model Cameron TD-500-AC-2M-R0F  Load rating 1,000,000 lbf [4,448,222 N]  Max. drilling torque 51,000 ft.lbf [69,147 N.m]  Breakout torque 75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model Tet Engineering Services Rotary Spider™  Table opening size 37½ in [953 mm]  Mud pumps  Make and model CMP-1600  Max. input horsepower 1,600 hp
Static hook load         1,000,000 lbf [4,448,222 N]           Substructure         Make and model           Floor height         28 ft [8.5 m]           Clear height         24 ft [7.3 m]           Rotary load capacity         1,000,000 lbf [4,448,222 N]           Setback load capacity         700,000 lbf [3,113,755 N]           Traveling assembly         Cameron           Load rating         1,000,000 lbf [4,448,222 N]           Topdrive         Make and model           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [69,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table         T&T Engineering Services Rotary Spider™           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Substructure  Make and model  Floor height  Clear height  Clear height  Clear height  Anounce to the time time time to the time time time time time time time tim
Make and model         Maverick T1000           Floor height         28 ft [8.5 m]           Clear height         24 ft [7.3 m]           Rotary load capacity         1,000,000 lbf [4,448,222 N]           Setback load capacity         700,000 lbf [3,113,755 N]           Traveling assembly           Traveling block         Cameron           Load rating         1,000,000 lbf [4,448,222 N]           Topdrive           Make and model         Cameron TD-500-AC-2M-R0F           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [69,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Floor height 28 ft [8.5 m]  Clear height 24 ft [7.3 m]  Rotary load capacity 1,000,000 lbf [4,448,222 N]  Setback load capacity 700,000 lbf [3,113,755 N]  Traveling assembly  Traveling block Cameron  Load rating 1,000,000 lbf [4,448,222 N]  Topdrive  Make and model Cameron TD-500-AC-2M-R0F  Load rating 1,000,000 lbf [4,448,222 N]  Max. drilling torque 51,000 ft.lbf [69,147 N.m]  Breakout torque 75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model T&T Engineering Services Rotary Spider™  Table opening size 37½ in [953 mm]  Mud pumps  Mud pumps  Make and model CMP-1600  Max. input horsepower 1,600 hp
Clear height         24 ft [7.3 m]           Rotary load capacity         1,000,000 lbf [4,448,222 N]           Setback load capacity         700,000 lbf [3,113,755 N]           Traveling assembly           Traveling block         Cameron           Load rating         1,000,000 lbf [4,448,222 N]           Topdrive           Make and model         Cameron TD-500-AC-2M-R0F           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [69,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Rotary load capacity  1,000,000 lbf [4,448,222 N]  700,000 lbf [3,113,755 N]  Traveling assembly  Traveling block  Load rating  1,000,000 lbf [4,448,222 N]  Topdrive  Make and model  Cameron TD-500-AC-2M-ROF  Load rating  1,000,000 lbf [4,448,222 N]  Max. drilling torque  51,000 ft.lbf [69,147 N.m]  Breakout torque  75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model  T&T Engineering Services Rotary Spider™  Table opening size  37½ in [953 mm]  Mud pumps  Make and model  CMP-1600  Max. input horsepower  1,600 hp
Setback load capacity  Traveling assembly  Traveling block  Load rating  1,000,000 lbf [4,448,222 N]  Topdrive  Make and model  Cameron TD-500-AC-2M-ROF  Load rating  1,000,000 lbf [4,448,222 N]  Max. drilling torque  51,000 ft.lbf [69,147 N.m]  Breakout torque  75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model  T&T Engineering Services Rotary Spider™  Table opening size  37½ in [953 mm]  Mud pumps  Make and model  CMP-1600  Max. input horsepower  1,600 hp
Traveling assembly  Traveling block  Load rating  1,000,000 lbf [4,448,222 N]  Topdrive  Make and model  Cameron TD-500-AC-2M-ROF  Load rating  1,000,000 lbf [4,448,222 N]  Max. drilling torque  51,000 ft.lbf [69,147 N.m]  Breakout torque  75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model  T&T Engineering Services Rotary Spider™  Table opening size  37½ in [953 mm]  Mud pumps  Make and model  CMP-1600  Max. input horsepower  1,600 hp
Traveling block  Load rating  1,000,000 lbf [4,448,222 N]  Topdrive  Make and model  Cameron TD-500-AC-2M-ROF  Load rating  1,000,000 lbf [4,448,222 N]  Max. drilling torque  51,000 ft.lbf [69,147 N.m]  Breakout torque  75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model  T&T Engineering Services Rotary Spider™  Table opening size  37½ in [953 mm]  Mud pumps  Make and model  CMP-1600  Max. input horsepower  1,600 hp
Load rating       1,000,000 lbf [4,448,222 N]         Topdrive
Topdrive  Make and model  Cameron TD-500-AC-2M-ROF  Load rating  1,000,000 lbf [4,448,222 N]  Max. drilling torque  51,000 ft.lbf [69,147 N.m]  Breakout torque  75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model  T&T Engineering Services Rotary Spider™  Table opening size  37½ in [953 mm]  Mud pumps  Make and model  CMP-1600  Max. input horsepower  1,600 hp
Make and model         Cameron TD-500-AC-2M-R0F           Load rating         1,000,000 lbf [4,448,222 N]           Max. drilling torque         51,000 ft.lbf [69,147 N.m]           Breakout torque         75,000 ft.lbf [101,686 N.m]           Rotary table or slip table         T&T Engineering Services Rotary Spider™           Make and model         T&T Engineering Services Rotary Spider™           Table opening size         37½ in [953 mm]           Mud pumps           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Load rating       1,000,000 lbf [4,448,222 N]         Max. drilling torque       51,000 ft.lbf [69,147 N.m]         Breakout torque       75,000 ft.lbf [101,686 N.m]         Rotary table or slip table         Make and model       T&T Engineering Services Rotary Spider™         Table opening size       37½ in [953 mm]         Mud pumps         Make and model       CMP-1600         Max. input horsepower       1,600 hp
Max. drilling torque 51,000 ft.lbf [69,147 N.m]  Breakout torque 75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model T&T Engineering Services Rotary Spider™  Table opening size 37½ in [953 mm]  Mud pumps  Make and model CMP-1600  Max. input horsepower 1,600 hp
Breakout torque 75,000 ft.lbf [101,686 N.m]  Rotary table or slip table  Make and model T&T Engineering Services Rotary Spider™  Table opening size 37½ in [953 mm]  Mud pumps  Make and model CMP-1600  Max. input horsepower 1,600 hp
Rotary table or slip table       Make and model     T&T Engineering Services Rotary Spider™       Table opening size     37½ in [953 mm]       Mud pumps       Make and model     CMP-1600       Max. input horsepower     1,600 hp
Make and model     T&T Engineering Services Rotary Spider™       Table opening size     37½ in [953 mm]       Mud pumps     CMP-1600       Max. input horsepower     1,600 hp
Mud pumps         37½ in [953 mm]           Make and model         CMP-1600           Max. input horsepower         1,600 hp
Mud pumps       Make and model     CMP-1600       Max. input horsepower     1,600 hp
Make and model CMP-1600  Max. input horsepower 1,600 hp
Max. input horsepower 1,600 hp
Mud system
Active (usable) volume 1,375 bbl [219 m³]
Number of tanks 4
Power generation
Make and model CAT 3512C
Horsepower rating 1,476 hp
Kilowatt rating 1,101 kW
Well control
Annular preventer Cameron
Pressure rating 5,000 psi [34.5 MPa]
Opening size 13% in [346 mm]
Ram preventer Cameron; one single, and one double
Pressure rating 5,000 psi [34.5 MPa]
Opening size 13% in [346 mm]
Choke manifold M-I SWACO
Pressure rating 5,000 psi [34.5 MPa]
Size 4 in [102 mm]
Accumulator Cameron
Number of stations 7
Total volume 300 galUS
Pressure rating 3,000 psi [20.7 MPa]

## Maverick T1000

Mud-gas separator	M-I SWACO (35-bbl)
Vessel diameter	36 in [914 mm]
Fuel tank	TC44 compliant
Capacity	615 bbl [97,785 L]
Water tank	
Capacity	500 bbl [79,500 L]
Additional equipment	
Skidding system	T&T Engineering Services Lift & Slide™
Catwalk	Cameron
Pipe spinner	Blohm & Voss GraySpin® Mark 20
Power slips	None

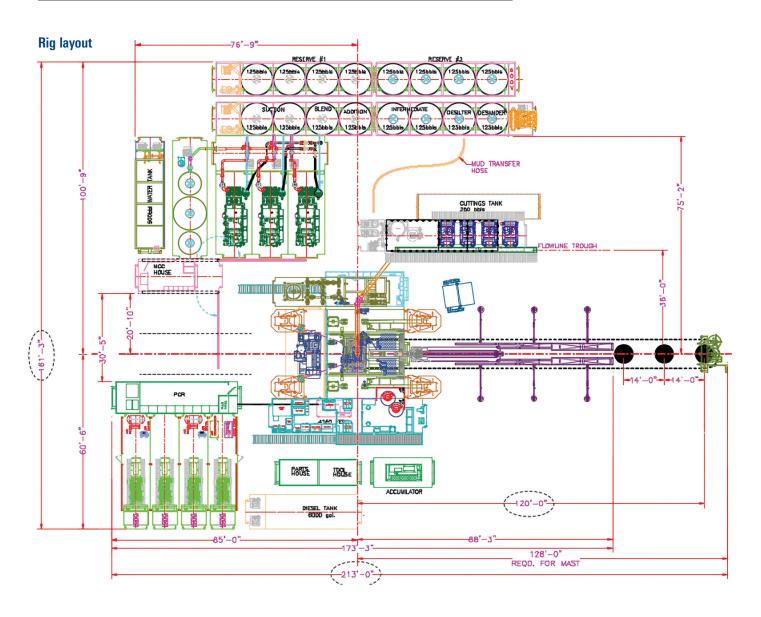

equip.slb.com/maverick

